

P3

P 3 Watt Series DC/DC Converters

Total power **3 Watts**
Input voltages **5V, 12V, 24V, 48V**
#of outputs **Single, Dual Output**



SPECIAL FEATURES

- CE(LVD) Marking
- High efficiency
- 300KHz fixed frequency
- Wide 2:1 input range
- Isolated output
- Surface mounting technology
- Small, compact size 1.85" x 1.1" x 0.35"
- Current mode control
- Output low ripple and noise
- Low start up current
- 3 years warranty

ENVIRONMENTAL

- Operating temperature range -20 ~71
- Option, see Note 1 -40 ~85
- Storage temperature range -40 ~105
- Operating humidity (non condensing) 20%~90%RH
- Storage humidity (non condensing) 10%~95%RH
- Cooling method Convection
- Case material Zn
- MTBF (MIL-HDBK-217F) 7.3×10^5 hrs
- Safety(Single output) CE(EN60950)
 *Approved through TÜV

ELECTRICAL SPECIFICATIONS

INPUT	<ul style="list-style-type: none"> · Input range DC 4.5V - 7.2V, 8V - 16.5V, 18V - 32V, 32V - 63V · Efficiency 66 - 85% typ.
OUTPUT	<ul style="list-style-type: none"> · Voltage tolerance $\pm 2\%$ (Single and uncomplementary dual) $\pm 3\%$ (Complementary dual) · Line regulation $\pm 0.5\%$ · Load regulation $\pm 1.0\%$ $\pm 2.5\%$ @ dual (minimum load 10%) · Ripple and Noise, pk-pk Bandwidth : 20MHz Magnitude : 1% Vout nom
PROTECTION CIRCUIT	<ul style="list-style-type: none"> · Short circuit protection Current limited output (note2)
ELECTRICALLY ISOLATED	<ul style="list-style-type: none"> · Isolation Input-output, input-case, output-case / DC 500V, 100Mohms · High pot Input-output, input-case, output-case / AC 500V, 1minute

NOTE 1. As a factory added option, the all model can be operated down to -40 , the suffix 'M' should be added to the model number when ordering. ex) PS3-24-5M
 2. Long term continuous operation into a short circuit will compromise the reliability of the uni.


Ordering Information

Input	Output1	Output2	Maximum Power	Ripple&Noise max	Efficiency Typ.	Model Number
4.5 - 7.2V	3.3V@0.60A		1.98W	50mVp-p	66%	PS3-5-3R3
4.5 - 7.2V	5V@0.60A		3.0W	50mVp-p	68%	PS3-5-5
4.5 - 7.2V	12V@0.25A		3.0W	120mVp-p	74%	PS3-5-12
4.5 - 7.2V	15V@0.20A		3.0W	150mVp-p	70%	PS3-5-15
4.5 - 7.2V	+12V@0.12A	-12V@0.12A	2.88W	120/120mVp-p	75%	PD3-5-1212
4.5 - 7.2V	+15V@0.10A	-15V@0.10A	3.0W	150/150mVp-p	72%	PD3-5-1515
8 - 16.5V	3.3V@0.60A		1.98W	50mVp-p	77%	PS3-12-3R3
8 - 16.5V	5V@0.60A		3.0W	50mVp-p	80%	PS3-12-5
8 - 16.5V	12V@0.25A		3.0W	120mVp-p	80%	PS3-12-12
8 - 16.5V	15V@0.20A		3.0W	150mVp-p	81%	PS3-12-15
8 - 16.5V	+12V@0.12A	-12V@0.12A	2.88W	120/120mVp-p	85%	PD3-12-1212
8 - 16.5V	+15V@0.10A	-15V@0.10A	3.0W	150/150mVp-p	83%	PD3-12-1515
18 - 32V	3.3V@0.60A		1.98W	50mVp-p	75%	PS3-24-3R3
18 - 32V	5V@0.60A		3.0W	50mVp-p	79%	PS3-24-5
18 - 32V	12V@0.25A		3.0W	120mVp-p	84%	PS3-24-12
18 - 32V	15V@0.20A		3.0W	150mVp-p	82%	PS3-24-15
18 - 32V	+12V@0.12A	-12V@0.12A	2.88W	120/120mVp-p	81%	PD3-24-1212
18 - 32V	+15V@0.10A	-15V@0.10A	3.0W	150/150mVp-p	82%	PD3-24-1515
32 - 63V	3.3V@0.60A		1.98W	50mVp-p	75%	PS3-48-3R3
32 - 63V	5V@0.60A		3.0W	50mVp-p	78%	PS3-48-5
32 - 63V	12V@0.25A		3.0W	120mVp-p	78%	PS3-48-12
32 - 63V	15V@0.20A		3.0W	150mVp-p	78%	PS3-48-15
32 - 63V	+12V@0.12A	-12V@0.12A	2.88W	120/120mVp-p	78%	PD3-48-1212
32 - 63V	+15V@0.10A	-15V@0.10A	3.0W	150/150mVp-p	78%	PD3-48-1515


Pin assignments

Single Output	Dual Output
1. +Vin	1. +Vin
2. -Vin	2. -Vin
3. +Vout	3. Output1
4. No pin	4. COM
5. -Vout	5. Output2

Derating Curve

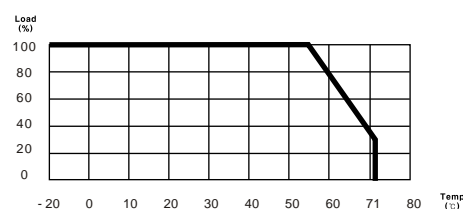

Dimensions

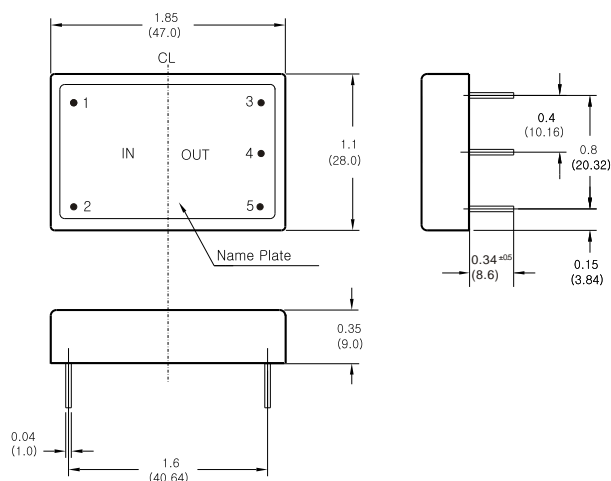

NOTES

1. All dimensions are in inches and(mm).
2. Weight : 22g or less

